



WCN Opto Group Co., Limited

Customer Name:

Date:

2024-9-24

Part No:

WCN3S-1030SR-C3

Product Group
Description:

LED Display

Customer Part No:

Approval Date:

Customer
Confirmation

Approved by

William
2024-9-24

Checked by

Athena
2024-9-24

Prepared By

Liu
2024-9-24

Country of Origin: China

WCN Opto Group Co., Limited

Buildings 1 and 2, No. 13, Songnan Road,
Sanhe Village, Tonghu Town,
Zhongkai High Tech Zone, Huizhou, Guangdong

Tel : (86)755-29520866

Mail:williamzhang@wcnopto.net



www . wcnopto.net

Table of Contents

NO.	ITEM	PAGE
1	Cover	1
2	Table of Contents	2
3	Revision Record	3
4	Description	4
5	Outer Dimension and Circuit Diagram	5
6	Absolute Maximum Rating and Electrical/Optical Characteristics Rating	6
7	Typical Electrical/ Optical Characteristic Curves and Spectrometer	7
8	Packaging Data	8
9	Moisture Proof Packaging	9



WCN Opto Group Co., Limited

REVISION RECORD

MARKER	Matter for revision	SHEET	DTAE	MAKER	APPOVED SIGN	
	Reason for revision					
A0	P# WCN3S-1030SR-C3	Whole Spec	2015-10-27-24	Liu	Athena	William
	New Version issued					
A1	Change version template and Packaging Data	Whole Spec	2024-9-24	Liu	Athena	William
	Improved					

1. Type No./Manufacture's Name


WCN3S-1030SR-C3 / WCN Opto Group Co., Limited.

2. Features:

- High Reliability
- Low Power Requirement
- Easy Assembly

3. Faction: Display Digit Characteristic**4. Soldering Conditions: Soldering Temp. 260 ± 5 °C, Soldering Time. 3~5 sec.**

Soldering Power <30 W.

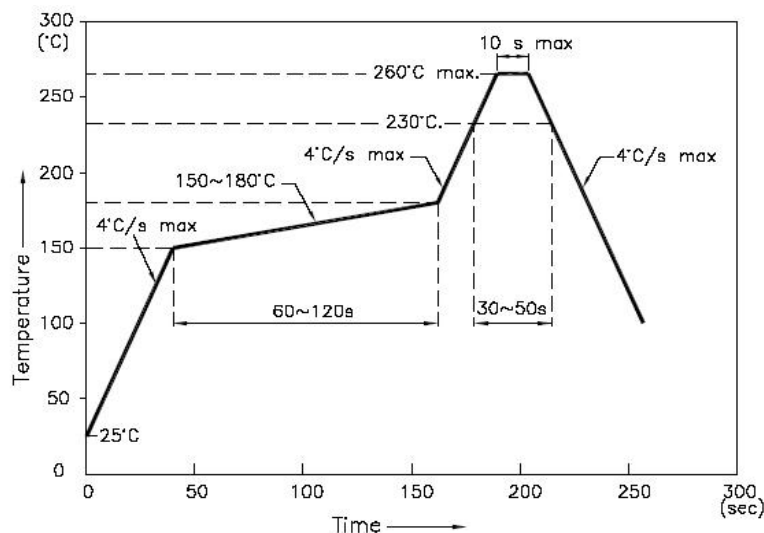5. Re-flow Temp/Time**NOTES:**


5.1. We recommend the re-flow temperature $245^{\circ}\text{C} (\pm 5^{\circ}\text{C})$. the maximum soldering temperature should be limited to 260°C .

5.2. Don't cause stress to the epoxy resin while it is exposed to high temperature. Number of re-flow process shall be 2 times or less.

6. Description:


- Three Digit LED Display
- Digit Height: 7.6mm (0.30")
- Gray Face and Milky Segment
- Color: Red

Outer Dimension:

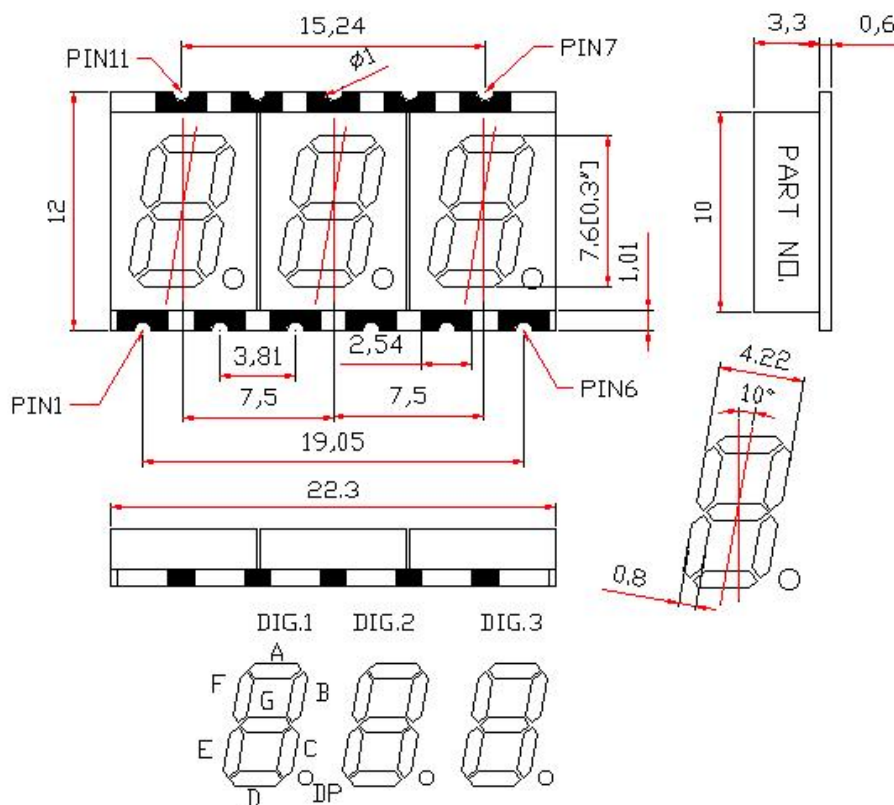

Notes: Unless otherwise stated, the tolerance is $\pm 0.25\text{mm}$.

Circuit Diagram:

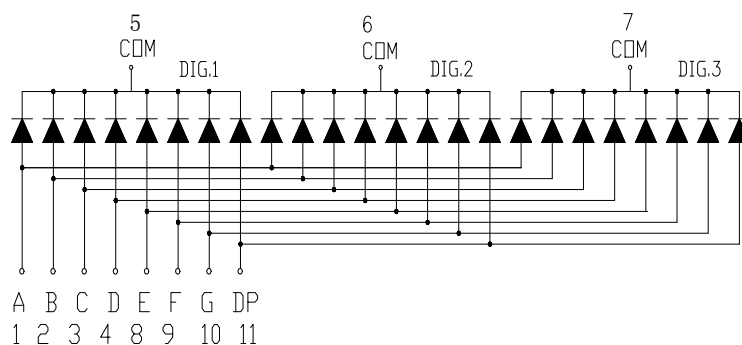

Pin Connection:

PIN NO.	CONNECTION	PIN NO.	CONNECTION
1	Anode A	7	Common Cathode Dig.3
2	Anode B	8	Anode E
3	Anode C	9	Anode F
4	Anode D	10	Anode G
5	Common Cathode Dig.1	11	Anode DP
6	Common Cathode Dig.2		

■ ABSOLUTE MAXIMUM RATINGS AT TA=25°C

Parameter	Symbol	Condition	Color	Rating	Units
Power Dissipation Per Segment	P _d	—	Red	62.5	mW
Forward Current Per Segment	I _F	—	Red	25	mA
Peak Forward Current Per Segment	I _{FP}	1/10 Duty 1KHz	Red	100	mA
Reverse Voltage Per Segment	V _R	—	Red	5	V
Operating Temperature Range	T _{opr}	—	—	-40~+105	°C
Storage Temperature Range	T _{stg}	—	—	-40~+105	°C

■ Electrical/Optical Characteristics Rating(Ta=25°C)

Item	Symbol	Test conditions	Location	Rating			Units
				Min.	Typ.	Max.	
Forward Voltage	V _F	I _F =20mA	Per Chip	1.7	2.0	2.5	V
Reverse Current	I _R	V _R =5V	Per Chip	—	—	100	μA
Luminous Intensity	I _V	I _F =10mA	Per Chip	4001	6500	10500	ucd
Wave Length	λ _P	I _F =20mA	Per Chip	—	635	—	nm
	λ _D			—	630	—	
Luminous Intensity Matching Ratio (Segment To Segment)	I _{v-m}	I _F =10mA				1.2:1	

■ Luminous Intensity Sorting: (Luminous intensity tolerance :+/-10%)

Rank	Symbol	Condition	Min	Max	Unit
L	L	I _F =10mA	4001	5000	ucd
M	M	I _F =10mA	5001	6100	ucd
N	N	I _F =10mA	6101	7200	ucd
O	O	I _F =10mA	7201	8500	ucd
P	P	I _F =10mA	8501	10500	ucd

■ **Typical Optical-Electronic Characteristic Curves**

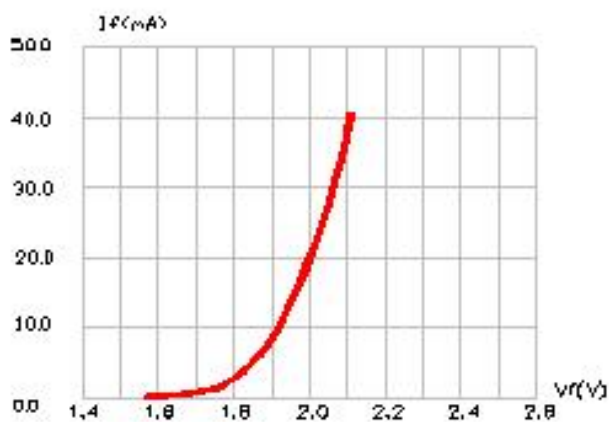


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE

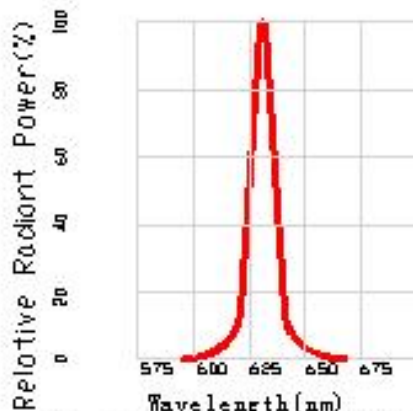


Fig.2 Relative Radiant Power vs. Wavelength

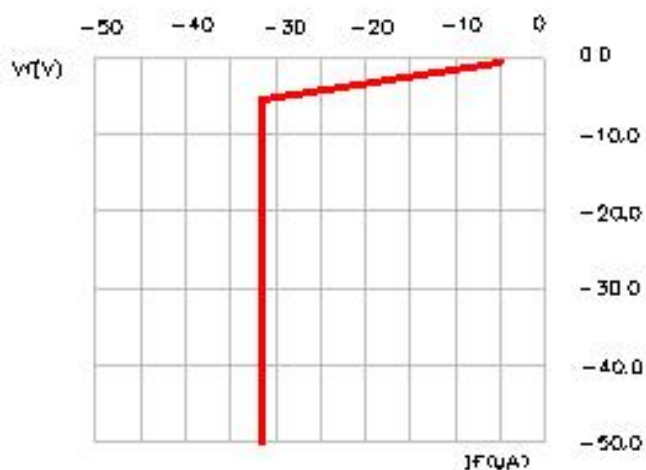


FIG.3 REVERSE CURRENT VS. REVERSE VOLTAGE.

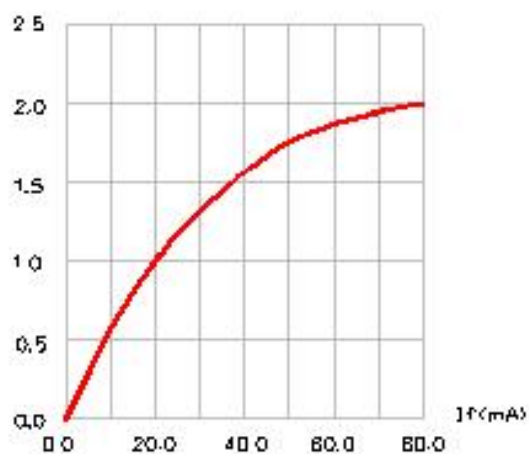


FIG.4 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT.



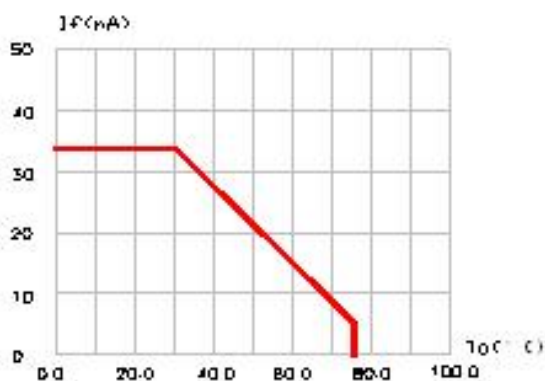


FIG.5 MAXIMUM FORWARD DC CURRENT VS. AMBIENT TEMPERATURE (Tjmax=95°C)

■ Packing Reel Dimensions(mm):

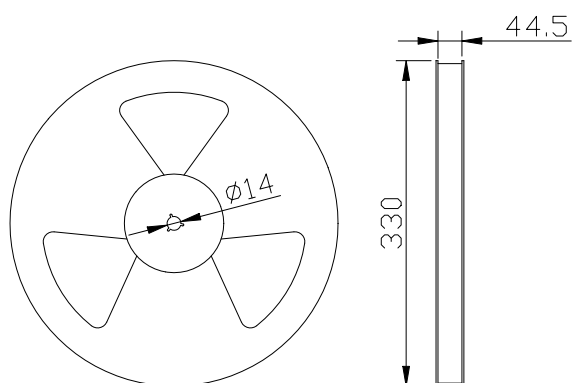


■ Dimensions of Tape (Unit: mm)

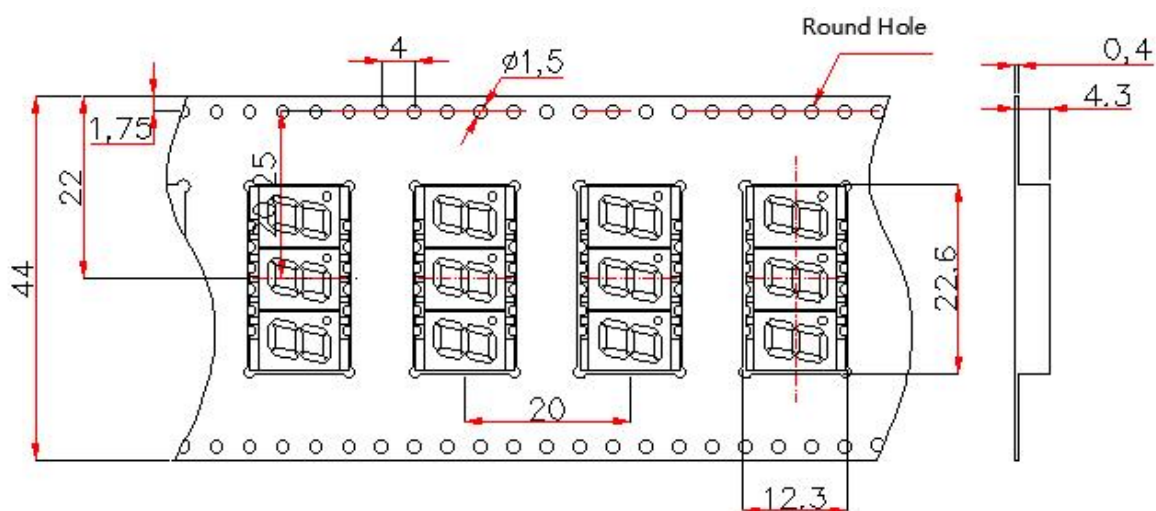


■ One Reel contained 800 PCS products:

■ Recommended Soldering Pattern:

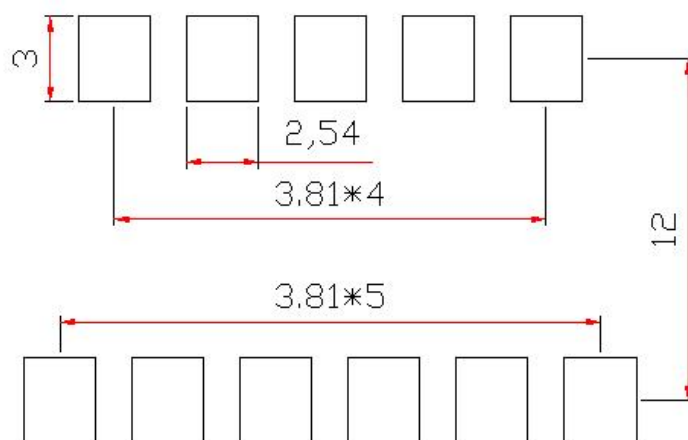

Moisture Proof Packaging:

All N/D SMD displays are shipped in moisture proof package. The displays should be stored at 30°C or less and 60% RH or less. Once the package opened, moisture absorption begins.

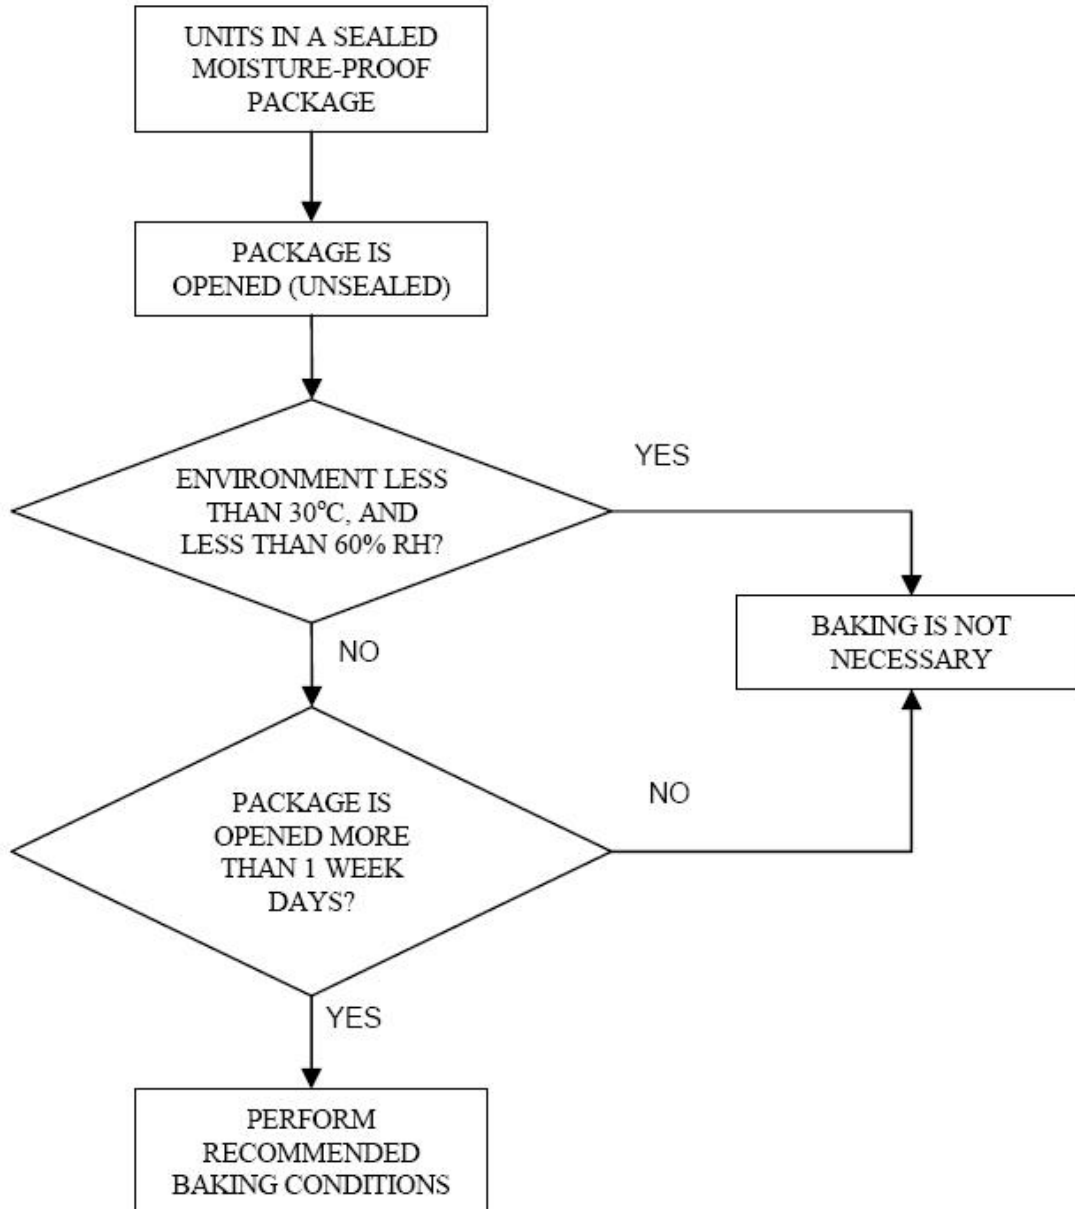**Baking Conditions:**

If the parts not stored in dry conditions, they must be baked before re-flow to prevent damage to the parts.

Package	Temperature	Time
In Reel	60 °C	≥ 48hours
In Bulk	100 °C	≥ 4hours
	125 °C	≥ 2hours

Baking should only be done once.